


# 100 Series

## 4-Way Selector Valve

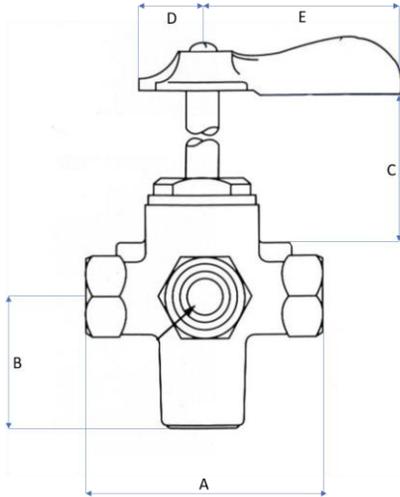

The 100 Series non-lubricated selector valves are designed to operate in systems where instantaneous port selection is desired. Since lubricants are not used, re-lubrication is not required. There is no lubricant to freeze and lock the valve or to contaminate fine fluids. The O-ring sealed cap and stem eliminate leakage. The series is designed for panel or bracket mounting. Standard with pointer lever to indicate the desired porting selection and can be rotated 360 degrees.

- Various stem lengths and handle rotations available

Pressure Rating:  
30 P.S.I.

Temperature Rating:  
-40° to 180°F

Part No.	A	B	C	D	E
100C-J					
100C-L	2.12	1.00	1.38	0.59	1.90
100C-N	2.24	1.00	1.38	0.59	1.90

Part No.	FNPT		FNPT		FNPT		FNPT
100C-J	1/8"	x	1/8"	x	1/8"	x	1/8"
100C-L	1/4"	x	1/4"	x	1/4"	x	1/4"
100C-N	3/8"	x	3/8"	x	3/8"	x	3/8"